




## FEATURES

- 1/2.9" 2Megapixel CMOS
- Max 30fps@1080P
- High Definition Composite video Interface
- Day/Night(ICR), AWB, AGC, BLC, 2D-DNR
- 3.6mm fixed lens
- HD and SD output switchable
- Max. IR LEDs length 30m, Smart IR
- IP67, DC12V

## DIMENTION

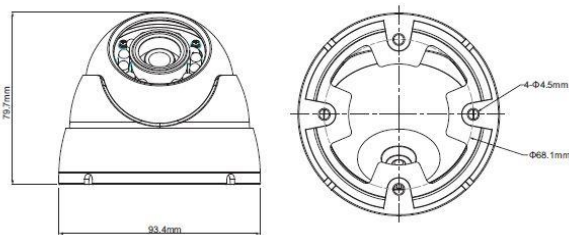

## SPECIFICATION

Image Sensor	1/2.9" 2Megapixel CMOS
Effective Pixels	1920(H)×1080(V)
Scanning System	Progressive
Electronic Shutter	PAL: 1/25~1/100000s NTSC: 1/30~1/100000s
Video Frame Rate	25/30fps@1080P, 25/30/50/60fps@720P
Synchronization	Internal
Min. Illumination	0.02Lux/F2.0, 0Lux IR on
Video Output	1-channel BNC HDCVI high definition video output
IR LEDs	12
<b>Camera Features</b>	
Max. IR LEDs Length	30m, Smart IR
Day/Night	Auto(ICR) / Color / B/W
Noise Reduction	2D
WDR	DWDR
<b>Lens</b>	
Focal Length	3.6mm
Mount Type	Board-in
Max Aperture	F2.0
Angle of View	H: 82.8°
Focus Control	N/A
Close Focus Distance	800mm 31.5"
<b>General</b>	
Power Supply	DC12V±25%
Power Consumption	Max 2.8W
Working Environment	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 90% RH
Transmission Distance	Over 500m via 75-3 coaxial cable
Ingress Protection	IP67
Dimensions	Φ93.4mm×79.4mm
Weight	0.35kg

