




FEATURES

- 1/2.9" 2Megapixel CMOS
- 2.7-13.5mm vari-focal lens
- Max 30fps@1080P
- High speed, long distance real-time transmission
- HD and SD switchable
- OSD Menu, control over coaxial cable
- DWDR, Day/Night(ICR), AWB, AGC, BLC, 2DNR
- Max. IR length 30m, Smart IR
- IP67, DC12V

DIMENTION

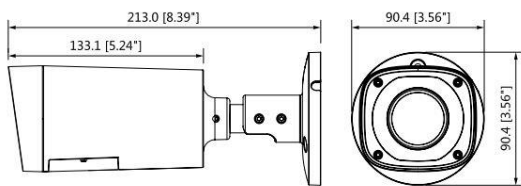

SPECIFICATION

Camera	
Image Sensor	1/2.9" 2Megapixel CMOS
Effective Pixels	1920(H)×1080(V), 2MP
Electronic Shutter Speed	PAL: 1/25~1/100000s , NTSC: 1/30~1/100000s
Minimum Illumination	0.02Lux/F1.3, 30IRE, 0Lux IR on
S/N Ratio	More than 65dB
IR Distance	Up to 30m (98feet)
IR On/Off Control	Auto / Manual
IR LEDs	24
Camera Features	
Backlight Compensation	BLC / HLC / DWDR
Day/Night	Auto (ICR) / Manual
Noise Reduction	2D
WDR	DWDR
White Balance	Auto / Manual
OSD Menu	Multi-language
Smart IR	Auto / Manual
Lens	
Lens Type	Vari-focal lens / Fixed iris
Focal length	2.7-13.5mm
Angle of View	H: 104°~28°
Mount Type	Board-in
Focus Control	Manual
Max Aperture	F1.3
Close Focus Distance	200mm 7.87'
Interface	
Audio Interface	N/A
Certifications	
Certifications	CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
General	
Power Supply	DC12V± 25%
Power Consumption	Max 4.2W (12V DC, IR on)
Working Environment	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67
Dimensions(W× D× H)	213.0mm×90.4mm×90.4mm (8.39"×3.56"×3.56")
Weight	0.68kg (1.50lb)

