




FEATURES

- 1/3" 4Megapixel CMOS
- 25fps@4MP
- High speed, long distance real-time transmission
- HD and SD dual-output
- OSD Menu, control over coaxial cable
- WDR 120dB, Day/Night(ICR), AWB, AGC, BLC, 2D-3DNR
- 3.6mm fixed lens
- Max. IRLEDs length 30m, Smart IR
- IP67, DC12V

DIMENTION

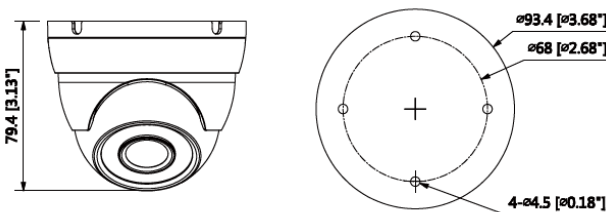

SPECIFICATION

Camera	
Image Sensor	1/3" 4 Megapixel CMOS
Effective Pixels	2688(H)×1520(V) , 4.1MP
Scanning System	Progressive
Electronic Shutter Speed	PAL: 1/4s~1/100,000s
Minimum Illumination	0.01Lux/F1.5, 0Lux IR on
S/N Ratio	More than 65dB
IR Distance	Up to 30m (98feet)
IR On/Off Control	Auto / Manual
IR LEDs	12
Lens	
Lens Type	Fixed lens / Fixed iris
Mount Type	Board-in
Mount Type	3.6mm
Max Aperture	F1.5
Angle of View	H: 79°
Focus Control	N/A
Close Focus Distance	1500mm (900mm, 1700mm) 59.06" (35.43", 66.93")
Video	
Resolution	4MP (2560×1440)
Frame Rate	25fps@4MP, 25/30fps@1080P
Video Output	1-channel BNC HDCVI high definition video output & 1-channel BNC CVBS video output
Day/Night	Auto (ICR) / Manual
OSD Menu	Multi-language
BLC Mode	BLC / HLC / WDR
WDR	120dB
Gain Control	AGC
Noise Reduction	2D/3D
White Balance	Auto / Manual
Smart IR	Auto / Manual
Electrical	
Power Supply	12V DC ±25%
Power Consumption	Max 4.1W (12V DC, IR on)
Environmental	
Operating Conditions	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH * Start up should be done at above -30°C (-22°F)
Storage Conditions	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67
Casing	Aluminium
Dimensions	Φ93.4mm×79.4mm (Φ3.68"×3.13")
Net Weight	0.28kg (0.62lb)
Gross Weight	0.35kg (0.77lb)

