




FEATURES

- 1/2.7" 2Megapixel progressive scan CMOS
- H.264&MJPEG dual-stream encoding
- 25/30fps@2M(1920× 1080)
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 3.6mm fixed lens
- Max. IR LEDs Length 30m
- IP67, PoE

DIMENTION

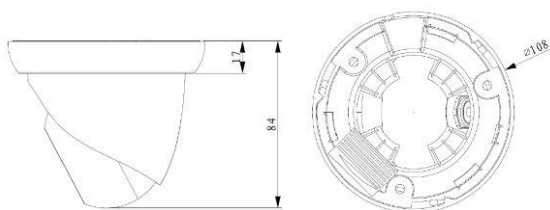

SPECIFICATION

Camera		
Image Sensor		1/2.7" 2Megapixel progressive scan Exmor CMOS
Effective Pixels		1920(H)×1080(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto/Manual, 1s~1/30000s
Min. Illumination		0.025Lux/F2.1 (Color), 0Lux/F2.1(IR on)
S/N Ratio		More than 50dB
Video Output		N/A
Camera Features		
Max. IR LEDs Length		30m
Day/Night		Auto(ICR)/Color/B/W
Backlight Compensation		BLC / HLC / DWDR
White Balance		Auto/Manual
Gain Control		Auto/Manual
Noise Reduction		3D
Privacy Masking		Up to 4 areas
Lens		
Focal Length		3.6mm
Max Aperture		F2.1 (F2.0)
Focus Control		Manual
Angle of View		H: 93°(63°)
Lens Type		Fixed Iris
Mount Type		Board-in Type
Video		
Compression		H.264/ H.264H/ H.264B/ MJPEG
Resolution		1080P(1920×1080)/1.3M(1280×960)/720P(1280×720)/D1(704×576/704×480) /CIF(352×288/352×240)
Frame	Main Stream	1080P (1 ~ 25/30fps)
Rate	Sub Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate		H.264: 4K ~ 8192Kbps
Corridor Mode		Support
Audio		
Compression		N/A
Interface		N/A
Network		
Ethernet		RJ-45 (10/100Base-T)
Wi-Fi		N/A
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour,
ONVIF		ONV1,CGI
Max. User Access		20 users
Smart Phone		iPhone, iPad, Android, Windows Phone
Auxiliary Interface		
Memory Slot		N/A
RS485		N/A
Alarm		N/A
PIR Sensor Range		N/A
General		
Power Supply		DC12V, PoE (802.3af)
Power Consumption		Max 4.4W (IR on)
Working Environment		-30°C~+60°C, Less than 95% RH
Ingress Protection		IP67
Vandal Resistance		N/A
Dimensions		Φ108mm× 84mm
Weight		0.25Kg(with package 0.38Kg)

