




FEATURES

- 1/3" 1.4Megapixel CMOS
- 25/30fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switchable
- OSD Menu, control over coaxial cable
- Day/Night(ICR), AWB, AGC, BLC, 3D-DNR
- 3.6 mm fixed lens
- Max. IR LEDs length 20m, Smart IR
- IP66, DC12V

DIMENTION

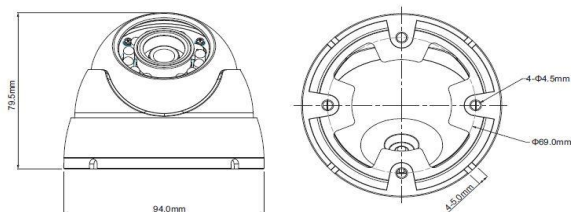

SPECIFICATION

Camera	
Image Sensor	1/3" 1.4Megapixel CMOS
Effective Pixels	1305(H)×1049(V)
Electronic Shutter	1/3s~1/100,000s
Video Frame Rate	25/50fps@720P
Synchronization	Internal
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Video Output	1-channel BNC HDCVI high definition video output/ CVBSstandard definition video output (Can switch)
Camera Features	
Max. IR LEDs Length	20m, Smart IR
Day/Night	Auto(ICR) / Color / B/W
Noise Reduction	2D/3D
OSD Menu	Support
Lens	
Focal Length	3.6 mm
Mount Type	M12
General	
Power Supply	DC12V±10%
Power Consumption	Max 6W
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)
Transmission Distance	Over 500m via 75-3 coaxial cable
Ingress Protection	IP66
Dimensions	Φ94.0mm×79.5mm
Weight	0.33kg

