




FEATURES

- 1/2.7" 2Megapixel progressive scan CMOS
- H.264&MJPEG dual-stream encoding
- 25/30fps@2M(1920×1080)
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 3.6mm fixed lens
- Max. IR LEDs Length 30m
- IP67, PoE

DIMENTION

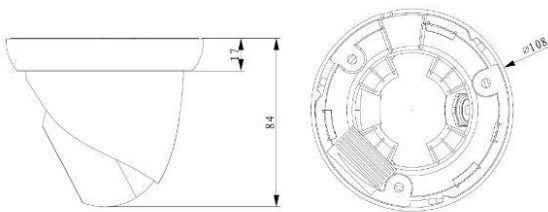

SPECIFICATION

Camera	
Image Sensor	1/2.7" 2Megapixel progressive scan Exmor CMOS
Effective Pixels	1920(H)×1080(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual, 1s-1/30000s
Min. Illumination	0.025Lux/F2.1 (Color), 0Lux/F2.1 (IR on)
S/N Ratio	More than 50dB
Video Output	N/A
Camera Features	
Max. IR LEDs Length	30m
Day/Night	Auto(ICR)/Color/B/W
Backlight Compensation	BLC / HLC / DWDR
White Balance	Auto/Manual
Gain Control	Auto/Manual
Noise Reduction	3D
Privacy Masking	Up to 4 areas
Lens	
Focal Length	3.6mm
Max Aperture	F2.1 (F2.0)
Focus Control	Manual
Angle of View	H: 93°(63°)
Lens Type	Fixed Iris
Mount Type	Board-in Type
Video	
Compression	H.264/ H.264H/ H.264B/ MJPEG
Resolution	1080P(1920×1080)/1.3M(1280×960)/720P(1280×720)/D1(704×576/704×480) /CIF(352×288/352×240)
Frame Rate	Main Stream 1080P (1 ~ 25/30fps) Sub Stream D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 4K ~ 8192Kbps
Corridor Mode	Support
Audio	
Compression	N/A
Interface	N/A
Network	
Ethernet	RJ-45 (10/100Base-T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour,
ONVIF	ONVI,CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	N/A
RS485	N/A
Alarm	N/A
PIR Sensor Range	N/A
General	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	Max 4.4W (IR on)
Working Environment	-30°C~+60°C, Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	N/A
Dimensions	Φ108mm×84mm
Weight	0.25Kg(with package 0.38Kg)

