




FEATURES

- 1/1.8" 6Megapixel progressive scan CMOS
- H.264 & MJPEG dual-stream encoding
- Max 25/30fps@6.0M(3072x2048)
- Multiple De-wrap Mode: Original ,Panoramic, Double Panoramic,1+3,Eptz,4 pictures
- DWDR, Day/Night(ICR), 3DNR,ROI,AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- Max.IR LEDs Length 10m
- I/I alarm in/out(Built in Mic)
- Micro SD memery,IP67,IK10,PoE

DIMENTION

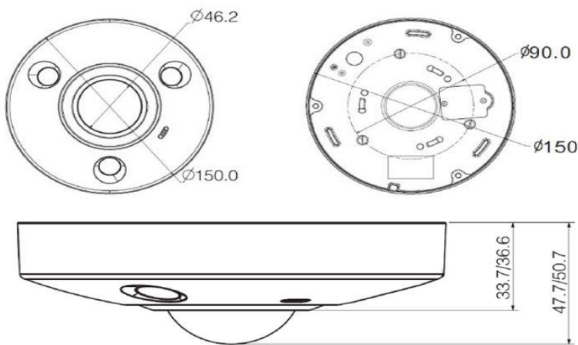

SPECIFICATION

Camera		
Image Sensor	1/1.8" 6Megapixel progressive scan CMOS	
Effective Pixels	3072(H)x2048(V)	
Scanning System	Progressive	
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/10000s	
Min. Illumination	Color: 0. 1Lux/F2.0, B/W: 0Lux/F2.0(IR On)	
S/N Ratio	More than 50dB	
Video Output	N/A	
Camera Features		
Max. IR LEDs Length	10m	
Day/Night	Auto(ICR)/Color/B/W	
Backlight Compensation	BLC / HLC / WD	
White Balance	Auto/Manual	
Gain Control	Auto/Manual	
Noise Reduction	3D	
Privacy Masking	Up to 4 areas	
Lens		
Focal Length	1.55 mm	
Max Aperture	F2.0	
Focus Control	Manual	
Angle of View	185°/185°/185°	
Lens Type	Manual	
Mount Type	Board-in Type	
Video		
Compression	H.264H/H.264/MJPEG/JPEG	
Resolution	6M(3072× 2048)/3M(2048× 1536)/1080P(1920× 1080)	
Frame Rate	Main Stream	6M(1 ~ 25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate		
De-wrap Mode	Original ,Panoramic, Double Panoramic,1+3,Eptz,4 pictures	
Audio		
Compression	G.711a/ G.711u/ PCM	
Interface	1/1 channel In/Out (Built in Mic)	
Network		
Ethernet	RJ-45 (100/1000Base-T)	
Wi-Fi	N/A	
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour,	
ONVIF	ONVIF , PSIA ,CGI	
Max. User Access	20 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	
Auxiliary Interface		
Memory Slot	Micro SD, Max 64GB	
RS485	N/A	
Alarm	2/1 channel In/Out	
PIR Sensor Range	N/A	
General		
Power Supply	DC12V , PoE (802.3af)	
Power Consumption	Max 11W	
Working Environment	-30°C~+60°C , Less than 95% RH	
Ingress Protection	IP66	
Vandal Resistance	IK10	
Dimensions	Φ150mm× 50.7mm	
Weight	0.58kg(0.86kg with packaging)	

