

## DH-HAC-B2A21

2MP HDCVI IR Bullet Camera

## HDCVI



- · Max. 30fps@1080P
- · HD and SD output switchable
- · 3.6mm fixed lens (6mm optional)
- · Max. IR length 20m, Smart IR
- · IP67, DC12V













#### **System Overview**

Experience 1080P full HD video and the simplicity of using existing cabling infrastructure with HDCVI. The Cooper series 1080P HDCVI camera features a compact design and offers a high quality image at a friendly price. It offers various vari-focal/fixed lens models with a multi-language OSD and HD/SD switchable output. Its structural flexibility and high cost-performance makes the camera an ideal choice for SMB solutions.

#### **Functions**

#### 4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals to be transmitted over 1 coaxial cable simultaneously, i.e. video, audio\*, data and power. Dual-way data transmission allows the HDCVI camera to interact with the HCVR, such as sending control signal or triggering alarm. Moreover, HDCVI technology supports PoC for construction flexibility.

\* Audio input is available for some models of HDCVI cameras.

#### **Long Distance Transmission**

HDCVI technology guarantees real-time transmission at long distance without any loss. It supports up to 800m(1080P)/1200m(720P) transmission via coaxial cable, and up to 300m(1080P)/450m(720P) via UTP cable.\*

\*Actual results verified by real-scene testing in Dahua's test laboratory.

#### Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system, making itself a best choice for investment protection. HDCVI system can seamlessly upgrade the traditional analog system without replacing existing coaxial cabling. The plug and play approach enables full HD video surveillance without the hassle of configuring a network.

#### **Smart IR**

The camera is designed with microcrystalline LED IR illumination for best lowlight performance. Smart IR is a technology to ensure brightness uniformity in B/W image under low illumination. Dahua's unique Smart IR adjusts to the intensity of camera's infrared LEDs to compensate for the distance of an object, and prevents IR LEDs from overexposing images as the object come closer to the camera.

#### Multi-formats

The camera supports multiple video formats including HDCVI, CVBS and other two common HD analog formats in the market. The four formats can be switched over through OSD menu or by PFM820 (UTC controller). This feature makes the camera to be compatible with not only HCVRs but also most end users' existing HD/SD DVRs.

#### Multi-language OSD

OSD menu provides multiple image adjustments and function settings to meet the requirements of different monitoring scenes. The OSD menu includes configurations such as backlight mode, day/night, white balance, privacy mask and motion detect. The camera supports 11 languages for OSD menu, namely, Chinese, English, French, German, Spanish, Portuguese, Italian, Japanese, Korean, Russian and Polish.

#### Protection

The camera's outstanding reliability is unsurpassed due to its rugged design. The camera is protected against water and dust with IP67 ranking, making it suitable for indoor or outdoor environments.

With working temperature range of-40 °C to +60 °C (-40 °F to +140 °F), the camera is designed for extreme temperature environments.

Supporting  $\pm 30\%$  input voltage tolerance, this camera suits even the most unstable power supply conditions. Its 4KV lightning rating provides protection against the camera and its structure from the effects of lightning.

## Cooper Series | DH-HAC-B2A21

Technical Specification		
Camera		
Image Sensor	1/2.7" CMOS	
Effective Pixels	1920(H)×1080(V), 2MP	
Scanning System	Progressive	
Electronic Shutter Speed	PAL: 1/25~1/100000s NTSC: 1/30~1/100000s	
Minimum Illumination	0.04Lux/F1.85, 30IRE, 0Lux IR on	
S/N Ratio	More than 65dB	
IR Distance	Up to 20m (66feet)	
IR On/Off Control	Auto / Manual	
Lens		
Lens Type	Fixed lens / Fixed iris	
Mount Type	Board-in	
Focal Length	3.6mm (6mm Optional)	
Max Aperture	F1.85	
Angle of View	H: 93° (54.7°)	
Focus Control	N/A	
Close Focus Distance	800mm (2000mm) 31.5" (78.74")	

#### **DORI** Distance

Note: The DORI distance is a "general proximity" of distance which makes it easy to pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specification and lab test result according to EN 62676-4 which defines the criteria for Detect, Observe, Recognize and Identify respectively.

	DORI Definition	Distance
Detect	25px/m (8px/ft)	3.6mm: 51m(167ft) 6mm: 80m(262ft)
Observe	63px/m (19px/ft)	3.6mm: 20m(66ft) 6mm: 32m(105ft)
Recognize	125px/m (38px/ft)	3.6mm: 10m(33ft) 6mm: 16m(52ft)
Identify	250ppm (76px/ft)	3.6mm: 5m(17ft) 6mm: 8m(26ft)

#### Pan / Tilt / Rotation

Pan/Tilt/Rotation	Pan: 0° ~ 360° Tilt: 0° ~ 90° Rotation: 0° ~ 360°
Video	
Resolution	1080P (1920×1080)

Resolution	1080P (1920×1080)
Frame Rate	25/30fps@1080P, 25/30/50/60fps@720P
Video Output	1-channel BNC high definition video output / CVBS video output (Can switch)
Day/Night	Auto (ICR) / Manual

	OSD Menu	Multi-language
	BLC Mode	BLC / HLC / DWDR
	WDR	DWDR
	Gain Control	AGC
	Noise Reduction	2D
	White Balance	Auto / Manual
	Smart IR	Auto / Manual
	Certifications	CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014)
	Interface	
	Audio Interface	N/A
	Eelectrical	
	Power Supply	12V DC ±30%
	Power Consumption	Max. 2.7W (12V DC, IR on)

# Environmental $-40^{\circ}\text{C} \sim +60^{\circ}\text{C} \left( -40^{\circ}\text{F} \sim +140^{\circ}\text{F} \right) / \text{Less than 95\% RH}$ \* Start up should be done at above- $40^{\circ}\text{C} \left( -40^{\circ}\text{F} \right) / \text{Less than 95\% RH}$ Storage Conditions $-40^{\circ}\text{C} \sim +60^{\circ}\text{C} \left( -40^{\circ}\text{F} \sim +140^{\circ}\text{F} \right) / \text{Less than 95\% RH}$ Ingress Protection & Vandal Resistance | RP67 |

Construction

## Casing Aluminium Dimensions 69.8mm×69.8mm×157.6mm (2.75"×2.75"×6.20") Net Weight 0.25kg (0.55lb) Gross Weight 0.30kg (0.66lb)

## Cooper Series | DH-HAC-B2A21

Ordering Information				
Туре	Part Number	Description		
	DH-HAC-B2A21P 3.6mm	2MP HDCVI IR Bullet Camera,		
2140.0	DH-HAC-B2A21P 6mm	PAL		
2MP Camera	DH-HAC-B2A21N 3.6mm	2MP HDCVI IR Bullet Camera,		
	DH-HAC-B2A21N 6mm	NTSC		
	PFA134	Junction box (For use alone or with PFA152-E pole mount)		
	PFA152-E	Pole mount (For use with PFA134 junction box)		
	PFM800-E	Passive HDCVI Balun		
Accessories	PFM800-4K	Passive Video Balun		
710003301103	PFM800B-4K	Passive Video Balun		
	PFM321	12V 1A Power Adapter		
	PFM320D-015	12V 1.5A Power Adapter		
	PFM300	12V 2A Power Adapter		
	PFM820	UTC Controller		



#### Optional:



PFA134 Junction box



PFM800-4K Passive Video Balun



PFM300

PFM320D-015 Power Adapter



PFA152-E

Pole mount


PFM800B-4K Passive Video Balun



PFM800-E Passive HDCVI Balun

PFM321 12V 1A Power Adapter

PFM820 12V 2A Power Adapter UTC Controller

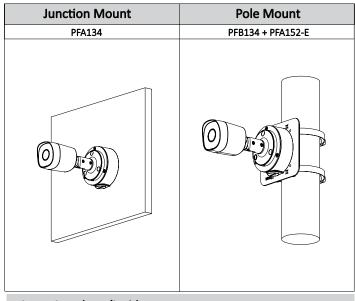

#### Dimensions (mm/inch)

