




## FEATURES

- 1/2.8" 2 Megapixel CMOS
- Starlight, 120dB true WDR, 3DNR
- 30fps@1080P
- HD and SD dual-output
- 3.6mm fixed lens
- Max. IR length 80m, Smart IR
- IP67, DC12V

## DIMENTION

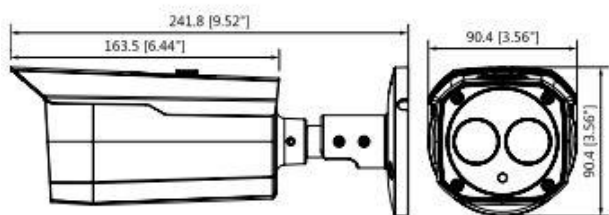

## SPECIFICATION

Camera	
Image Sensor	1/2.8" 2 Megapixel CMOS
Effective Pixels	1937(H)×1097(V), 2.1MP
Scanning System	Progressive
Electronic Shutter	PAL: 1/4s~1/100000s NTSC: 1/3s~1/100000s
Min. Illumination	0.005Lux/F1.6, 30IRE, 0Lux IR on
S/N Ratio	More than 65dB
IR Distance	Up to 80m (262feet)
IR On/Off Control	Auto / Manual
IR LEDs	2
Lens	
Lens Type	Fixed lens / Fixed iris
Mount Type	Board-in
Focal Length	3.6mm
Max Aperture	F1.6
Angle of View	H: 87°
Close Focus Distance	1200mm 47.24"
Video	
Resolution	1080P (1920×1080)
Frame Rate	25/30fps@1080P, 25/30fps@720P
Video Output	1-channel BNC HDCVI high definition video output & 1-channel BNC CVBS video output
Day/Night	Auto (ICR) / Manual
OSD Menu	Multi-language
BLC Mode	BLC / HLC / WDR
WDR	120dB
Gain Control	AGC
Noise Reduction	2D / 3D
White Balance	Auto / Manual
Smart IR	Auto / Manual
Certifications	
Certifications	CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
General	
Power Supply	DC12V±25%
Power Consumption	Max 4.8W (12V DC, IR on)
Working Environment	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67
Dimensions(W×D×H)	241.8mm×90.4mm×90.4mm (9.52"×3.56"×3.56")
Weight	0.76kg (1.68lb)

